
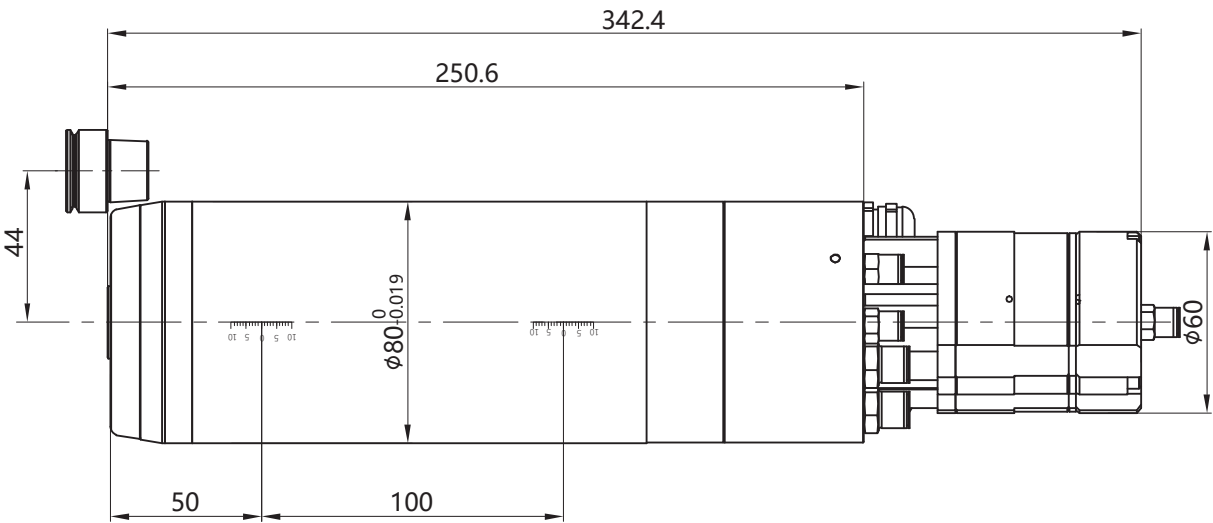
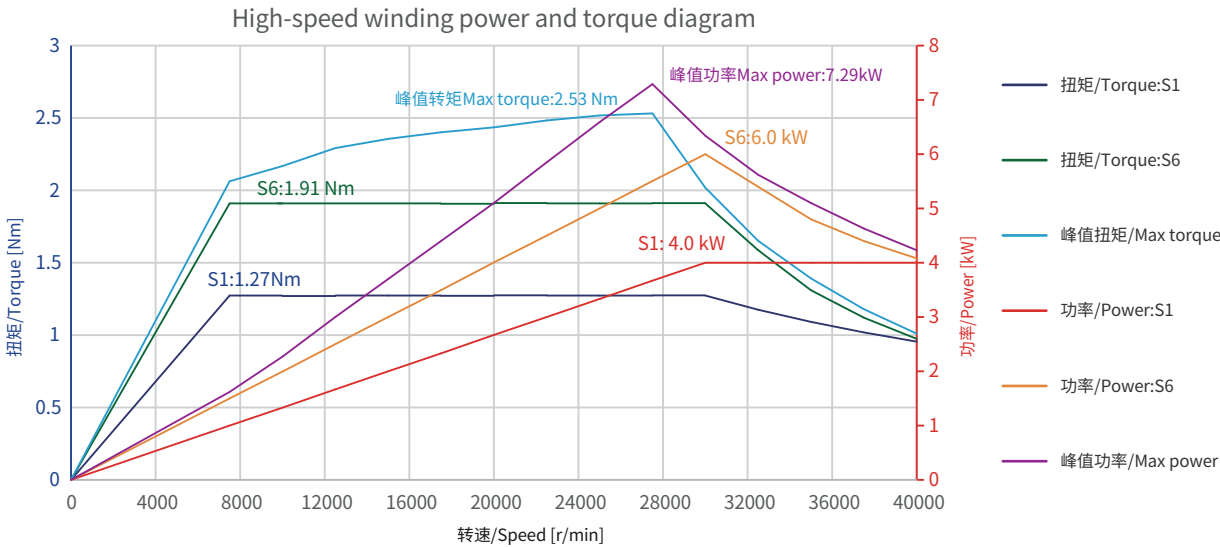


DGZX-08040/4.0-HSK

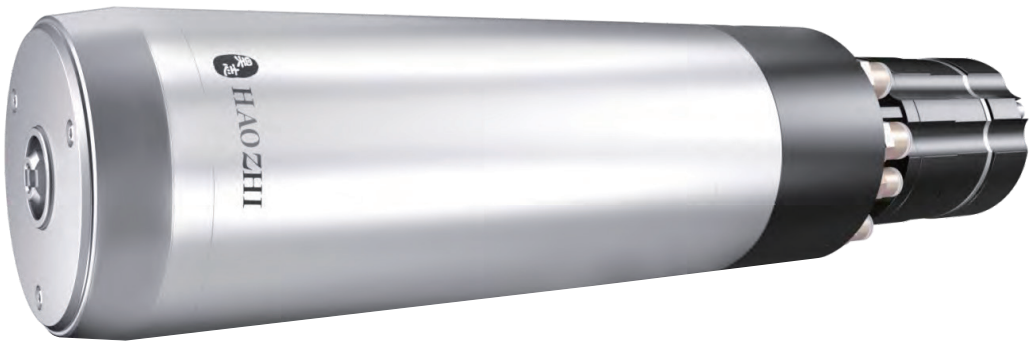

Spindle model	DGZX-08040/4.0-HSK
Diameter	$\phi 80\text{mm}$
The highest speed	40,000rpm
Tool interface	HSK E25
Bearingtype	Ceramic ball bearing
Max.Frequency	1333Hz
Motor system	Asynchronous
The rated voltage	380V
Power outputS1 100%	4.0kW
Power output S6 40%	6.0kW
Output torque S1 100%	1.29N·m
Output torque S6 40%	1.93N·m
Rated current S1 100%	8.2A
Rated current S6 40%	12.3A
Air seal gas flow rate	50±15L/min (Air pressure 0.15MPa)
Cooling system	Water cooling (Recommended)
The cooling flow rate	2~3L/min (Water pressure 0.25MPa)
Motor temperature sensor type	KTY or PTC(Optional)
Tool change	Air cylinder
Tool change air pressure	0.55-0.60MPa
Vibration velocity	≤0.8mm/s
Weight	8±1kg